


SUBMITTAL SHEET



Optional HOT Smoked Seal* gasket




Self latching Slam Catch



Masonry anchor straps standard on all fire-rated doors

FRONT ELEVATION

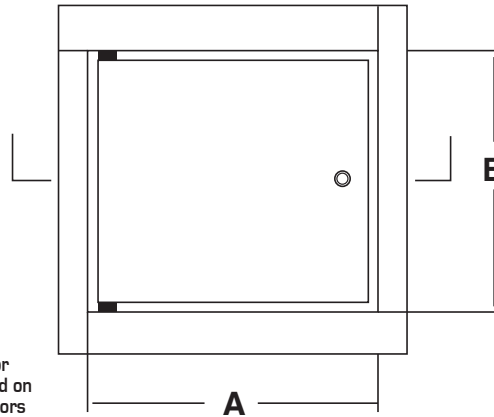

SECTION DETAIL

SPECIFICATIONS:

- Door:** 16 ga. steel
- Trim:** 16 ga. steel, 2 1/2" deep
- Finish:** Primed grey baked enamel
- Latches:** Mortise lock, slam catch
- Hinge:** Continuous hinge allows opening to 140°
- Insulation:** 2" thick, in between two pieces of 20 ga. steel
- Ceiling Installation:** Largest size acceptable is 24" x 36"

OPTIONS (at additional cost)

- Finishes:**
- Stainless Steel Type 304 No. 4 Satin Finish Brushed
 - Stainless Steel Type 316 No. 4 Satin Finish Brushed
- Options: (additional cost)**
- Mortise Best Lock or locks by others
 - Hot Smoke Seal gasket all 4 sides* *
 - Special sizes available
 -

Fire-rated access door for ceiling and wall installation



Warnock Hersey listed for ceiling installations with 3 hour non-combustible rating or 1 hour combustible rating. Test # WHI-495-PSH-0163


This product has been approved by the California State Fire

Marshall (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing No 3330-1223:101 for allowable values and/or conditions for use concerning material presented in this document. It is subject reexamination, revision and possible cancellation.


1-1/2 hour UL"B" label in a 2 hour fire barrier. Test # R13067-1

This product has been approved by the California State Fire Marshall (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing No 3330-1223:101 for allow-able values and/or conditions for use con-cerning material presented in this document. It is subject reexamination, revision and possible cancellation.

CEILING INSTALLATION (Side View)
Use "C" Dimension for Masonry Installation Without Wallboard Liner
Use "D" Dimension for 5/8" Wallboard Liner of Opening on 4 Sides

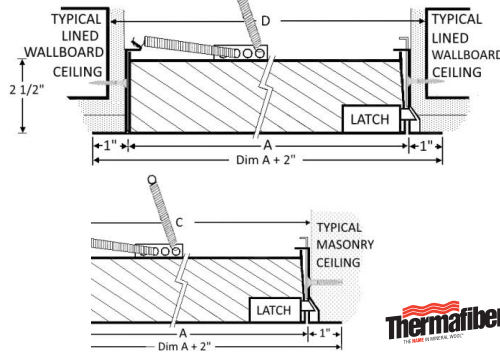

WALL INSTALLATION 1-1/2 HOUR UL"B" LABEL IN A 2 HOUR FIRE BARRIER Use "C" Dimension for Installation Without Wallboard Liner
Add 1-5/8" to "A" for 5/8" Wallboard Liner of Opening on 4 Sides

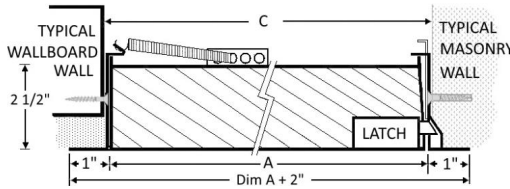

THIS DRAWING IS AN ILLUSTRATION ONLY - INSTALLATION CONDITIONS MAY VARY

✓	Item No.	Door Size W x H	Wall Opening	Slam Catch	Ship Wt. Lbs.
	FR 800	8 x 8	8 1/4 x 8 1/4	1	8
	FR 800	10 x 10	10 1/4 x 10 1/4	1	10
	FR 800	12 x 12	12 1/4 x 12 1/4	1	12
	FR 800	12 x 18	12 1/4 x 18 1/4	1	12
	FR 800	12 x 24	12 1/4 x 24 1/4	1	19
	FR 800	14 x 14	14 1/4 x 14 1/4	1	14
	FR 800	16 x 16	16 1/4 x 16 1/4	1	17
	FR 800	18 x 18	18 1/4 x 18 1/4	1	21
	FR 800	18 x 24	18 1/4 x 24 1/4	1	26
	FR 800	20 x 20	20 1/4 x 20 1/4	1	24
	FR 800	20 x 24	20 1/4 x 24 1/4	1	26
	FR 800	20 x 30	20 1/4 x 30 1/4	2	32
	FR 800	21 x 36	21 1/4 x 36 1/4	2	37
	FR 800	22 x 22	22 1/4 x 22 1/4	1	28
	FR 800	22 x 24	22 1/4 x 24 1/4	1	29
	FR 800	22 x 30	22 1/4 x 30 1/4	2	39
	FR 800	22 x 36	22 1/4 x 36 1/4	2	47
	FR 800	24 x 24	24 1/4 x 24 1/4	1	32
	FR 800	24 x 30	24 1/4 x 30 1/4	2	43
	FR 800	24 x 36	24 1/4 x 36 1/4	2	48
	FR 800	24 x 48	24 1/4 x 48 1/4	2	62
	FR 800	30 x 30	30 1/4 x 30 1/4	2	50
	FR 800	32 x 32	32 1/4 x 32 1/4	2	60
	FR 800	36 x 36	36 1/4 x 36 1/4	2	67
	FR 800	36 x 48	36 1/4 x 48 1/4	2	88
	FR 800	48 x 48	48 1/4 x 48 1/4	2	104

Innovative line of fire-rated access panels for every type of installation meets testing standards: UBC 43-7, UL10B, CAN/ULC-S104, ASTM E152. Access panels are rated to 1-1/2 hours for 2 hour fire barriers for vertical surfaces in sizes up to 48" x 48" (24" x 48" for Heavy Gauge). All models feature a 2" thick insulated door, slam latch with spring-assisted closer and welded-on masonry anchors. Minimum size 8" x 8".

* Hot Smoke Seal™ fire tested: Listed to meet the requirements of standards UL10B, UL10C, UBC 7-2, Part 1 and BS476: 1987 for application to fire rated door assemblies. Tested for smoke controlled assemblies: Listed to meet the requirements of standards UL1784, NFPA 105, UBC 7-2, Part 2, and BS476:Part 31, Section 31.1:1983.

Project: _____ Date: _____
 Contractor: _____ Architect: _____
 Sizes: _____ Quantity: _____ App Initials: _____

RELATED PRODUCTS

WB FRU 810 Ultra Series Fire-Rated



Distributed by
www.AccessDoor.com
 Phone: (800) 608-6568
 Fax: (409) 840-5545
 info@accessdoor.com

American Made



Family Owned & Operated
 Since 1990
 Selling only through distribution

See us on

