


## DETAIL & SUBMITTAL SHEET

WALLS & CEILINGS



FRONT ELEVATION

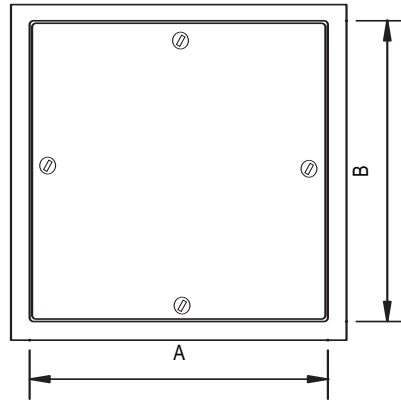


**SPECIFICATIONS:**

- Door: 14 ga. steel. Trim 1-1/2" wide.
- Frame: 18 ga. steel having a depth of 1-3/4"
- Latches: Flush, stainless steel cam latches on all 4 sides
- Finish: Grey baked enamel coat

**OPTIONS:**

- Finishes:**
- Stainless Steel Type 304 No. 4 Satin Finish Brushed
  - Stainless Steel Type 316 No. 4 Satin Finish Brushed
- Options:**
- WB 151 Key Code Cylinder locks-keyed alike with 2 keys per lock
  - Mortise Best Lock
  - Weather resistive neoprene gasketing all 4 sides\*
  - Special sizes available

SECTION DETAIL

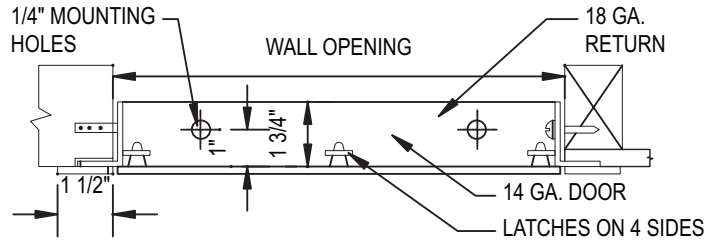

Designed with the same quality features as our GP Premium door, but primarily designed for use in confined areas. Simply unscrew the cam latches, and the panel can be easily removed. The frame is laser cut from one sheet of steel for visual aesthetics.

✓	Item No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
	RP 110	8 x 8	8 1/4 x 8 1/4	4	3
	RP 110	12 x 12	12 1/4 x 12 1/4	4	8
	RP 110	16 x 16	16 1/4 x 16 1/4	4	10
	RP 110	18 x 18	18 1/4 x 18 1/4	4	13
	RP 110	24 x 24	24 1/4 x 24 1/4	8	20

\* Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_

Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ Approval Initials: \_\_\_\_\_

**Distributed by**  
**www.AccessDoor.com**  
 Phone: (800) 608-6568  
 Fax: (409) 840-5545  
 info@accessdoor.com



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630